


NVR

32 CH PoE NVR

12MP/8MP/6MP/5MP/4MP/3MP/1080P/960P/720P HD PoE NVR

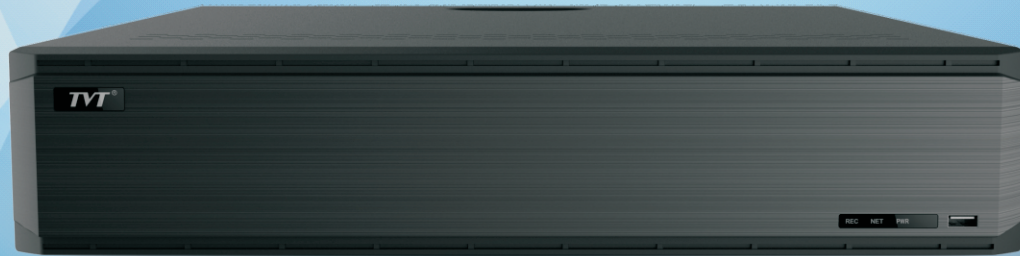

TD-3532H8-16P-A1

- 4K Output
- HD IPC
- DDNS
- Network
- PTZ
- Audio
- MIC
- Mobile
- CMS
- USB
- Mouse
- E-mail
- STD
- FR
- VCA

TD-3532H8-16P-A1 supports 32 CH 12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P/1280 × 1024 / 960P / 720P high definition IP input, which adopts the advanced SOC technique to ensure high definition recording in each channel and realize outstanding robustness of the system.

TD-3532H8-16P-A1 integrates with 16 PoE network ports and supports 16 CH IPC direct connection to NVR , simultaneous 16 CH playback, and 4K high definition display. The product can meet different security requirements of home, financial commerce, enterprise, transportation and government, etc.



en.tvt.net.cn

For more information, please visit our website

SPECIFICATIONS



Model		TD-3532H8-16P-A1
System	OS	Embedded Linux
Video	Network Input	32 CH IPC input
	Incoming Bandwidth	256Mbps
	Outgoing Bandwidth	256Mbps
	Network Input Resolution	12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 / 960P / 720P / 960H / D1 / CIF
	Output	HDMI × 1 : 3840×2160@60fps/3840×2160@30fps/ 1920×1080/1280×1024/1024×768 VGA × 1 : 1920×1080/1280×1024/1024×768
	Compression	H.265S/H.265+/H.265/H.264
	Client Connection	1/4/6/8/9/13/16/25/32/36
Audio	Network Input	32 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
	Compression	G.711(U/A)
Record	Record Stream	Dual stream recording
	Resolution	12MP@20fps; 8MP/6MP/5MP/4MP/3MP/1080P/1280×1024/ 960P/720P/960H/D1/CIF@30fps(NTSC)/25fps(PAL)
	Mode	Manual, timer, motion, sensor, smart events
Decoding Capability	Live View/ Playback	1CH 12MP/4CH 5MP/9CH 720P/16CH D1
Playback	Simultaneous Playback	Max 16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception, smart events
	Input	16 CH local alarm input; supports IPC alarm input
	Output	4 CH
	Triggering	Record, snapshot, buzzer, preset, e-mail, etc.
Face	Channel	32 CH
	Face Picture Database	32 libraries 5000 Face Pictures
	Computing Capability	180 pictures / minute
	Face Picture Search	Search by picture is supported
	Database Management	Add, modify, delete and search face pictures
	Face Picture Adding	Add face pictures through APP, WEB and external import
	Face Picture Comparison	Support allow list, block list and stranger match alarm
	Track	Track display on a map
	Statistic Graph of Face Information	Bar graph
Statistic Mode of Face Information	Statistics by day, week, month, quarter as well as customized time period	
Video Structure Analysis	Human/Vehicle Classification	Yes
Other Functions	Fisheye	Supports fisheye dewarping via Web Client and mobile APP
	Plate Recognition	Yes

PoE	PoE Port	RJ45 × 16
	Standard	IEEE802.3af
	Output Power	≤ 150W
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 1
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP, HTTP, HTTPS, 802.1x, ONVIF, etc.
	Client Connection	Max. 20 users access
Mobile Device	OS	iOS, Andriod
Storage	HDD Interface	SATA × 8, max 8T per HDD; E-SATA × 1
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	RS 485	Yes (full-duplex), connect to PTZ or keyboard
	USB	USB 2.0 × 1, USB 3.0 × 1
	Remote Controller	Optional
Others	Power Supply	ATX 300W
	Consumption	≤ 15W (without HDD and PoE power supply)
	Dimensions (mm)	445 × 436 × 90 (W × D × H)
	Working Environment	-10 ~ 50°C, 10% ~ 90% humidity
	Certificate	CE, FCC
	Environmental Protection	Directive EU RoHS, REACH and WEEE

Features

- Supports 32 CH 12MP / 8MP / 6MP / 5MP / 4MP / 3MP / 1080P / 1280 × 1024 / 960P / 720P / 960H / D1 / CIF IP video input
- H.265S/H.265+/H.265/H.264 coding
- Intuitive and user-friendly Graphic User Interface (GUI), Windows style operation by mouse
- Multi-mode recording: manual / timer / motion / sensor / smart events
- Playback : 16 CH simultaneous playback
- Search : time slice, time, event, tag search and smart search
- Supports face detection and comparison
- Supports multiple VCA (Video Content Analytics) events, such as object abandoned/missing, region intrusion, tripwire, video exception, etc.
- Supports POS information overlay on live view and playback
- Express and flexible backup via USB, network and so on
- Pentaplex : preview, record, playback, backup and remote access
- DHCP, DDNS, PPPoE network protocol
- Remote control via Web Client or CMS : preview, playback, backup, PTZ and configuration
- 16 PoE network ports; PoE power supply supported
- Dual stream technology for local storage with high definition, remote network transmission and remote surveillance with mobile device
- Multi-user online simultaneously
- Authorization management, log view and device status view
- 4K output, true high resolution display
- Supports PTZ preset and auto cruise, up to 255 presets and 8 cruises
- Supports NAT function and QRCode scanning by mobile phones
- Powerful mobile surveillance by smart phones with iOS and Andriod OS

DIMENSIONS

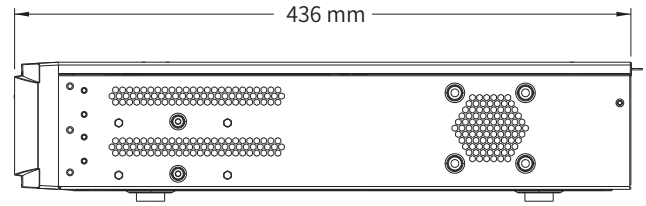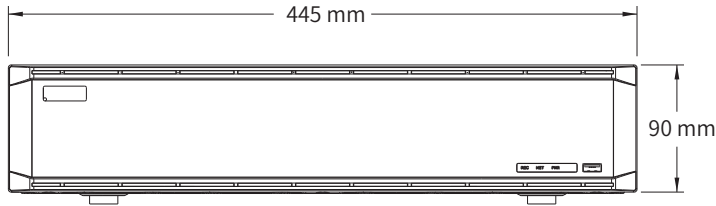

REAR PANEL

