

Proximity Reader

Applied with EM card / Mifare card / Felica card / DESFire card / QR code



PQ-510


Features

- Built-in buzzer for sound notification.
- Provides tamper switch.
- Ability to read multiple formats.
- With CPU watch-dog function to prevent malfunction.
- Provide OEM/ODM projects development.


Specification

- RFID frequency : 125KHz ASK/125KHz FSK/13.56MHz
- Applicable cards : EM 4001, EM 4102 compatible / TEMIC 5557/ Mifare S50, S70, Ultra Light
- Output format (Interface) : RS-232, RS-485, Wiegand 26/34bits, USB
- Mounting : Surface Mount
- Power input : DC 5V / DC 12V
- Flash : Yellow (Power On)
- LED : Red (Scanning)

Dimension Unit:mm[inch]

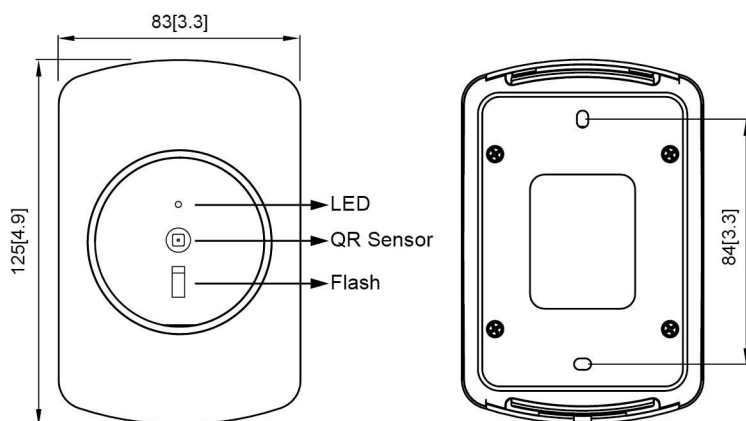

Personal access control



Production control



BUS/train/airline ticketing



Meeting attendance

Ordering information

- PQ-510HW** : 125KHz FSK HC & QR Code proximity reader, Wiegand 26/34bits
PQ-510NW26 : 125KHz ASK EM & QR Code proximity reader, Wiegand 26bits
PQ-510NW34 : 125KHz ASK EM & QR Code proximity reader, Wiegand 34bits
PQ-510M0W26 : 13.56MHz Mifare & QR Code proximity reader, Wiegand 26bits, Read card number: in reverse
PQ-510M0W34 : 13.56MHz Mifare & QR Code proximity reader, Wiegand 34bits, Read card number: in reverse

PONGEE INDUSTRIES CO., LTD.

5F., No.738, Chung-Cheng Rd., Chung-Ho District, New Taipei City 23511, Taiwan

Tel : 886-2-82280198

Fax : 886-2-82280191

E-mail : pongee@pongee.com.tw

Website: <http://www.pongee.com>

We reserve the right to change the specification without prior notice or obligation!



20190110